ESCORTS





RATED CAPACITY

14 Tonne at 1.6 m radius 1.9 Tonne at 10.07 m radius

ENGINE

Make & Model Escorts AE 4.312C-3A four cylinder, water

cooled diesel engine developing 49.5 HP @ 2200 RPM or equivalent.

*500 hrs service interval available in escorts engine.

TRANSMISSION

Drive 2 Wheel drive

Type Heavy duty transmission developed

especially for crane application. Constant mesh gearbox coupled with straight drive axle. Eight forward and two reverse speeds

with high/low selector lever.

Creep Speed 1.9 km/hr. ideal for crane operation (laden)

Max. Speed 29 km/hr. (unladen)

Clutch Heavy duty clutch, wire woven,

asbestos free.

STEERING

Articulated power steering, hydraulically Type

controlled through 2 double acting jacks.

Articulation Up to 56° Turning Radius 6.5 m

HOIST MECHANISM

Hoist Hydraulic winch. Six falls (Winch

capacity 12 T). Rope dia 13 mm

BRAKES

Front Wheel Pneumatic assisted hydraulic brakes

Rear Wheel Disc brakes actuated through a slave cylinder

Parking Hand control valve operated, Air assisted

Hydraulic parking brakes at rear wheels

(Standard models)

Hand control valve operated, Air assisted Parking brakes at Front wheels (with Air

brake models)

HYDRAULIC SYSTEM

Pump Vane type hydraulic pump

4 spool control valve with built in

pressure relief valve and precision control Suction line has a 100 mesh in-line strainer Hydraulic Filter

while return line has 25 microns full flow filter

ELECTRICAL SYSTEM

Control Valve

12V Single battery, Negative earth Type

CAPACITIES

38 ltrs. Fuel Tank Hydraulic Tank 65 ltrs.

TRACK

Front 1980 mm (center of twin wheels) Rear 1680 mm (center of wheels)

OVERALL DIMENSIONS

11900 mm Length Width 2550 mm Height 3100 mm

OPERATING WEIGHT (KG)

Gross Vehicle

Weight 11000 kg

BOOM

3 parts hydraulically powered & fully Telescoping

synchronized

Type Slotted boom with rope compensation

Derricking Through double acting jacks

TYRES

Front 11.00 X 20 - 16 PR (4 nos.), inflation

pressure 110 - 115 PSI

13.00 X 24 - 12 PR (2 nos.), inflation Rear

pressure 35 PSI. Water ballasted

SAFETY SYSTEM

Overload audio warning system

Safety brakes on hoist

Cylinder guard for protection

Hose protection failure device

Rope compensation for auto leveling

System Low air pressure warning buzzer

STANDARD ACCESSORIES

All Weather Cabin

Lift Cylinder Guard

Turn & Reverse Lamp

Front Bumper

Rear View Mirror

Reflectors

OPTIONAL ACCESSORIES

Fly Jib

Tool Box

Spark Arrestor

Tyre Guard

Steering Wheel


Fire Extinguisher

Safe Load Indicator

Heavy Duty Bumper

14 x 24 Heavy Duty Tyres Air Brakes on Front Wheel

Over Hoist & Hydraulic Cutoff Kit

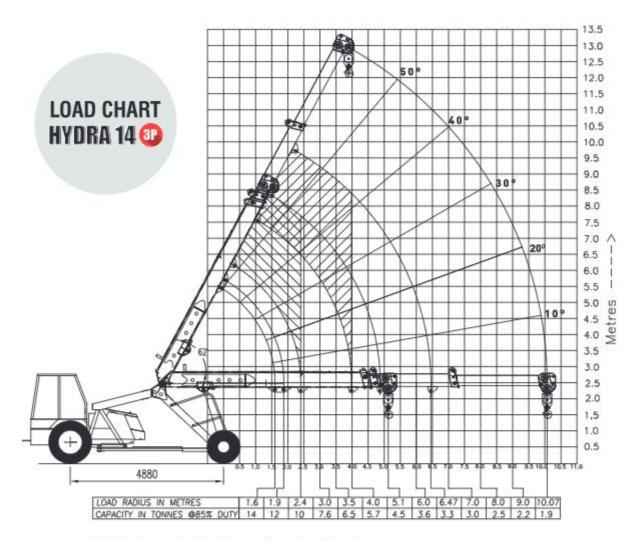

Rated loads are calculated for operation on leveled surface.

FEATURES



SLOTTED BOOM AND ROPE

Compensation for precision handling & auto levelling of loads.



REAR BRAKES

Disc brakes at the rear for effective braking



TRANSMISSION

Heavy duty straight axle with constant mesh transmission.



LIFT CYLINDER MOUNTING

Lift cylinders are mounted with adequate gap for better strength, stability & precision handling of loads.



CABIN

Ergonomically designed spacious cabin with modern dashboard for utmost operator comfort and operation.




ENGINE

Escorts engine BS-III (CEV compliant) high on power/torque & low on fuel consumption & maintenance.





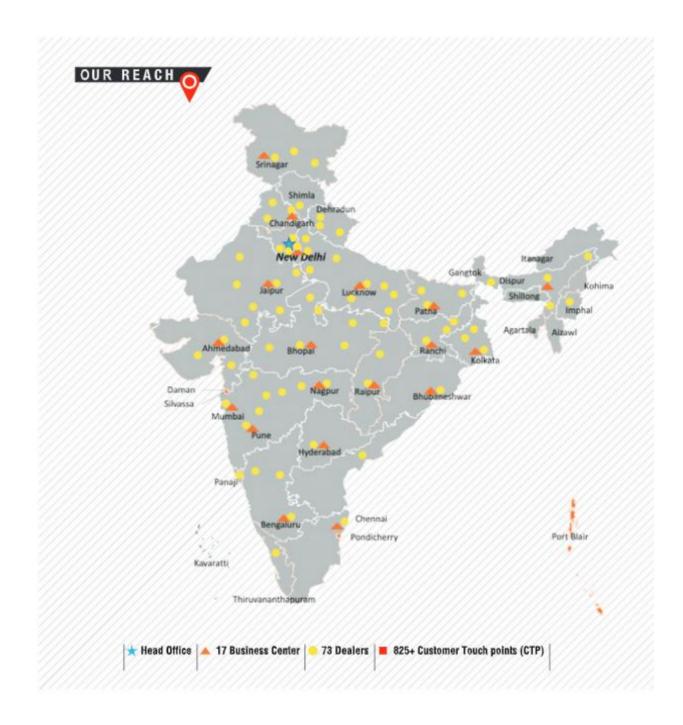



Escorts Kubota Limited (Formerly Escorts Limited) Construction Equipment Plot No. 219, Sector- 58, Ballabhgarh- 121 004, Faridabad, Haryana (INDIA) Tel.: 0129-2306574/2306598/2306571 Fax: 0129-2306572 Website: www.escortsgroup.com

Ger fron
Google Play
Download Customer App
for more details

Authorised Dealer

1800-180-4488

Toll Free No.: