# **ESCORTS**





#### SPECIFICATIONS

# RATED CAPACITY

1.6 m radius 15 Tonne at 12.5 m radius 1.2 Tonne at

#### **ENGINE**

Make & Model Escorts AE 4.312C-3A four cylinder, water

cooled diesel engine developing 49.5 HP @ 2200 RPM or equivalent

\*500 hrs service interval available in escorts engine.

# TRANSMISSION

Drive 2 Wheel drive

Type Heavy duty transmission developed

especially for crane application. Constant mesh gearbox coupled with robust straight drive axle. Eight forward and two reverse speeds with high/low

selector lever

Creep Speed 1.9 km/hr. ideal for crane operation

Max. Speed 29 km/hr. (unladen)

Clutch Heavy duty clutch, wire woven,

asbestos free

#### STEERING

Articulated power steering, hydraulically Type

controlled through 2 double acting jacks

Articulation Up to 56° Turning Radius 6.75 m

### HOIST MECHANISM

Hydraulic winch. Six falls Hoist

(Winch capacity 12 T). Rope dia 13 mm

#### BRAKES

Front Wheel Pneumatic assisted hydraulic brakes Rear Wheel

Disc brakes actuated through a slave

cylinder

Hand control valve operated, Air assisted Parking

Hydraulic parking brakes at rear wheels

(Standard models)

Hand control valve operated, Air assisted Parking brakes at Front wheels (with Air

brake models)

#### HYDRAULIC SYSTEM

Vane type hydraulic pump Pump

Control Valve 4 spool control valve with built in

pressure relief valve and precision control

Hydraulic Filter Suction line has a 100 mesh in line strainer

while return line has 25 microns full flow filter

#### **ELECTRICAL SYSTEM**

Type 12V Single battery, Negative earth

#### CAPACITIES

Fuel Tank 38 ltrs. Hydraulic Tank 65 ltrs.



#### TRACK

Front 1980 mm Rear 1680 mm



#### **OVERALL DIMENSIONS**

Length 11900 mm Width 2550 mm Height 3100 mm

# **OPERATING WEIGHT (KG)**

Gross Vehicle 11700 kg Weight



#### BOOM

4 parts, 3 parts hydraulically Telescoping powered & fully synchronized,

4th part power extended & manually pinned

Through double acting jacks Derricking

#### **TYRES**

Rear

Front 11.00 X 20 -16 PR (4 nos.), inflation pressure 110 - 115 PSI

13.00 X 24 -12 PR (2 nos.),

inflation pressure 35 PSI.

Water ballasted



#### SAFETY SYSTEM


- Rope compensation for auto leveling
- Overload audio warning system
- Hose protection failure device
- Safety brakes on hoist
- Cylinder guard for protection
- System Low air pressure warning buzzer

#### STANDARD ACCESSORIES

- All Weather Cabin
- Lift Cylinder Guard
- Turn & Reverse Lamp
- Front Bumper
- Rear View Mirror
- Reflectors

#### **OPTIONAL ACCESSORIES**

- Fly Jib
- Tool Box
- Tyre Guard
- Spark Arrestor
- Steering Wheel
- Fire Extinguisher
- Safe Load Indicator
- Heavy Duty Bumper
- 14 x 24 Heavy Duty Tyres
- Air Brakes on Front Wheel
- Over Hoist & Hydraulic Cutoff Kit

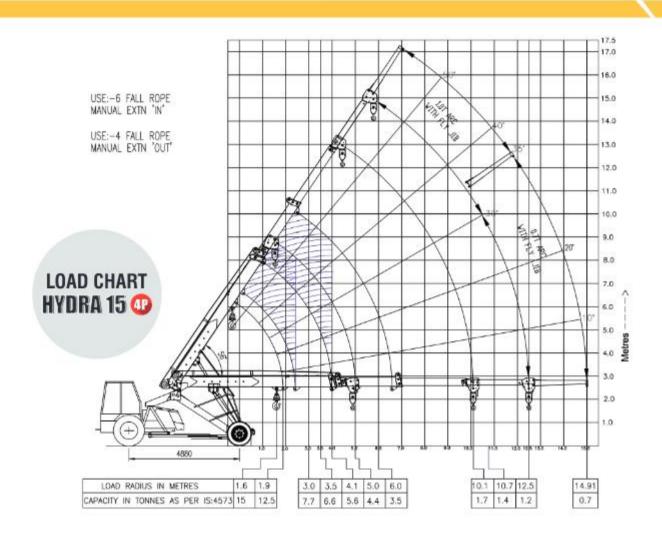

Rated loads are calculated for operation on leveled surface.

## FEATURES



SLOTTED BOOM AND ROPE

Compensation for precision handling & auto leveling of loads.



**HYDRAULIC WINCH OF 12T** 

Capacity with 6 falls snatch block for precision handling & low maintenance.



TRANSMISSION

Heavy duty straight axle with constant mesh transmission.



**ENGINE** 

Escorts Engine BS-III (CEV compliant)
- high on power/torque & low on fuel
consumption & maintenance.



CABIN

Ergonomically designed spacious cabin with modern dashboard for utmost operator comfort and operation.




REAR BREAKES

Disc brakes at the rear for effective braking.





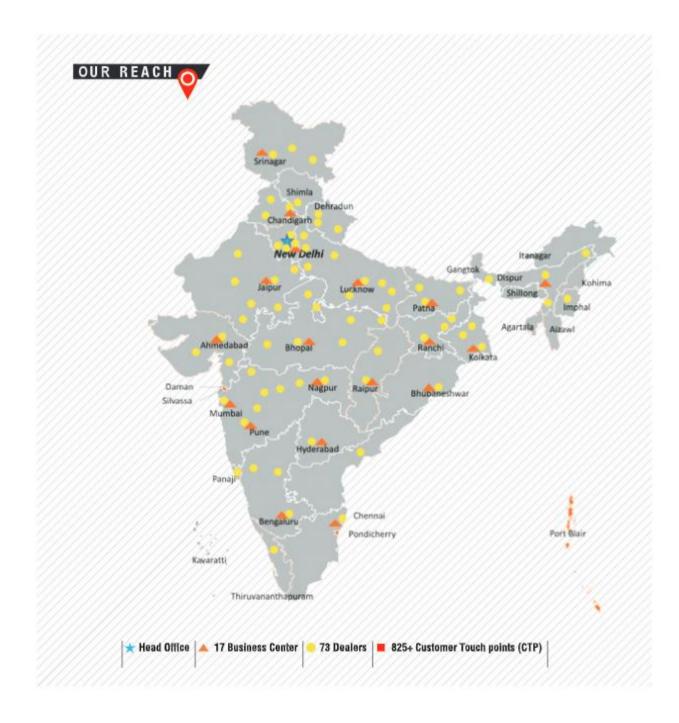



1800-180-4488 (Timings: 9.30 am - 6.00 pm, Monday to Friday)

e-mail: ece.helpline@escorts.co.in

Toll Free No.:

Escorts Kubota Limited (Formerly Escorts Limited) Construction Equipment Plot No. 219, Sector- 58, Ballabhgarh- 121 004, Faridabad, Haryana (INDIA) Tel.: 0129-2306574/2306598/2306571

Fax: 0129-2306572 Website: www.escortsgroup.com



Authorised Dealer